

# ENERGY STAR® ROOF PROGRAM ALTERNATIVE

## HOME AND BUILDING OWNERS

### DID YOU KNOW THAT...?

The ENERGY STAR® certification program for roofing products officially ended on June 1, 2022.

#### WHAT DOES THIS MEAN FOR YOU?

Roofing products with an ENERGY STAR label on the package are technically no longer certified as meeting specific performance standards. The U.S. Environmental Protection Agency prohibits the use of the certification label on roofing product packaging and literature. This may be why you're having trouble finding ENERGY STAR certified roofing products that qualify for a financial incentive or comply with a municipal ordinance or code requirement.

#### IS THERE AN ALTERNATIVE TO ENERGY STAR CERTIFICATION OF ROOFING PRODUCTS?

The Cool Roof Rating Council (CRRC) operates a rating program for roofing products that underpins many U.S. building codes and green building certification programs and publishes similar data to what was required for ENERGY STAR certification of roofing products. Over 3,000 roofing products are published in the CRRC Rated

Roof Products Directory, which is a free, publicly available online database that building owners, program developers, policymakers, contractors, and design professionals have relied on for years for third-party data. The directory is a reliable tool for searching for and comparing roofing products that may qualify for code compliance, green building certification, and financial incentives. The ratings are also on CRRC labels found on product packaging. Please check with the issuer of the financial incentive or your local building department to verify that a CRRC-rated product can be used for qualification or compliance.

 COOL ROOF RATING COUNCIL	Rated Product ID #: 0000-0000		
		Initial	Aged
Solar Reflectance	0.00	0.00	
Thermal Emittance	0.00	0.00	

The ratings above are subject to CRRC rating program conditions, requirements, and limitations. Visit [coolroofs.org](http://coolroofs.org) for important information and disclaimers about CRRC rating conditions, requirements, and limitations.

The standard CRRC Product Label. Usage requirements can be viewed at [COOLROOFS.ORG](http://COOLROOFS.ORG)

It is important to note that the CRRC Rated Roof Products Directory is not limited to products that meet ENERGY STAR certification criteria. Any roofing product can be rated as long as it complies with the CRRC-1 Product Rating Program Manual.

### WHAT WERE THE ENERGY STAR REQUIREMENTS?

FULL REQUIREMENTS  
CAN BE ACCESSED  
→ [HERE](#) ←

TABLE 1 – Specifications for Low-Slope Roof Products

Characteristic	Performance Specification
<b>Solar Reflectance</b>	
Initial Solar Reflectance	Greater than or equal to <b>0.65</b>
Maintenance of Solar Reflectance	Greater than or equal to <b>0.50</b> three years after installation under normal conditions

TABLE 2 – Specifications for Steep-Slope Roof Products

Characteristic	Performance Specification
<b>Solar Reflectance</b>	
Initial Solar Reflectance	Greater than or equal to <b>0.25</b>
Maintenance of Solar Reflectance	Greater than or equal to <b>0.15</b> three years after installation under normal conditions

### WHAT DO THE RATINGS MEAN?

The ratings are based on a product's surface radiative properties (solar reflectance and thermal emittance) and range from 0 to 1, with 1 being the most reflective or emissive. The ratings provide some indication to consumers about the effectiveness of a product in reducing building energy use, lowering indoor temperature, and mitigating the urban heat island effect ([learn more](#)).

### LEARN MORE

-  [WHAT IS A COOL ROOF?](#)
-  [CRRC RATED ROOF PRODUCTS DIRECTORY](#)

For more information and resources about cool roofs, visit [coolroofs.org](http://coolroofs.org).



# ENERGY STAR® ROOF PROGRAM ALTERNATIVE

## PROGRAM DEVELOPERS AND POLICYMAKERS

### Is there an alternative to ENERGY STAR certification of roofing products?

To help with ongoing compliance and enforcement of cool roof installations, references to ENERGY STAR could be replaced with references to the CRRC-1 Roof Product Rating Program (CRRC-1 Roof Program).

Replacing existing references to ENERGY STAR with the CRRC-1 Roof Program ensures that the solar reflectance, thermal emittance, and/or solar reflectance index (SRI) values used for compliance are independently obtained, verified, and publicly accessible.

Referencing the CRRC-1 Roof Program also allows for greater flexibility and control. Unlike certification programs like ENERGY STAR which require products to meet certain performance criteria, nearly any type of roofing product can be tested and rated per the CRRC-1 Roof Program. This gives entities the ability to set their own requirements and define what is a “cool roof” in their jurisdictions.

“Louisville’s Office of Sustainability offers a \$1/sf cool roof incentive to address the city’s significant urban heat island issue. Further, a majority of our incentive funds are dedicated to communities experiencing disparate impacts of urban heat. We have been utilizing the Cool Roof Rating Council (CRRC)’s rating program and product directory to continue to incentivize energy efficient cool roofs in our city beyond the sunset of the ENERGY STAR certified roofing program. CRRC allows our city, property owners, and contractors to more easily be part of the solution, which has allowed us to incentivize over 1 million square feet of cool roofs to date!”

– SUMEDHA RAO, Executive Director of City of Louisville’s Mayor’s Office of Sustainability

### What is the CRRC-1 Roof Program?

It’s a third-party product rating program for roofing products that is administered by the Cool Roof Rating Council (CRRC). The program has been in existence since 2002 and was developed with input from a wide array of stakeholders (learn more).

#### LEARN MORE

 **WHAT IS A COOL ROOF?**

 **CRRC RATED ROOF PRODUCTS DIRECTORY**

For more information and resources about cool roofs, visit [coolroofs.org](http://coolroofs.org).



### Examples of CRRC Rated Roof Product References

California Building Energy Efficiency Standards (Title 24, Part 6)

City of Denver Green Building Ordinance

City of Louisville Cool Roof Incentive Program

City of Los Angeles Green Building Code

City of Los Angeles Cool Roof Rebate

County of Los Angeles Green Building Standards Code

City of Miami Land Use Ordinance

Washington Evergreen Sustainable Development Standard, v4.0

# Steel Takes LEED® with Recycled Content

## steel beams and columns

## steel studs

## steel roofing

## steel decking

## steel doors

## ductwork

## steel siding

## corrugated steel pipe

## other steel components

Designers and builders have long recognized and lauded steel for its strength, durability, and functionality. Increasingly, however, architects are recognizing steel's important environmental attributes—especially its high recycled content and high reclamation rate.

For many years, there has been a strong economic motive to incorporate recycling into the process for making steel, but today's environmental concerns make recycling even more important. Recycling saves money while conserving energy and resources, as well as reducing solid, liquid, and gaseous wastes. Recycling also helps to spread the energy impact of the original extraction and manufacturing of the material over infinite generations of new steel.

The efficiency with which a material is recycled can be measured by either its *percentage of recycled content* or its *reclamation rate*. Recycled content is a measure of how much recycled material is contained in a finished product. The reclamation rate is a measure of how often a product is actually recycled at the end of its useful life. Steel is an exceptional performer by both measurements. In the construction industry, recent interest in recycling has been driven largely by the US Green Building Council's *Leadership in Energy and Environmental Design* (LEED®) rating system. The LEED rating system only promotes the use of materials with high levels of recycled content. The equally important reclamation rate of the materials is not currently considered.

Scrap consumption in the United States is maximized between the two types of modern steel mills, each of which generates products with varying levels of recycled content. One type of mill produces much of the steel for light flat-rolled steel products with about 30% *recycled content*. The other type of mill makes steel for a wide range of products, including flat-rolled, but is the only method used domestically for the production of structural shapes, which have about 95% *recycled content*. (These processes are covered in detail on the following pages.)

The amount of recycled content in steel products varies over time, both as a function of the cost of steel scrap and its availability. As the world-wide demand for steel increases, the available scrap will be stretched between more and more steel products, meaning that more raw steel will have to enter the production stream to meet the demand. Fortunately, steel is the country's

most widely recycled material, and as more steel is used for construction and other products, more scrap is available for future recycling. At the end of their useful life, about 88% of all steel products and nearly 100% of structural steel beams and plates used in construction are recycled into new products—an amazing reclamation rate!

In addition to recycled content, steel can contribute toward several other LEED credits, either directly or indirectly. Steel is dimensionally stable and, when properly designed, can provide an exceptionally tight building envelope for less air loss and better HVAC performance over time. Steel is made to exact specifications, so on-site waste is minimized. Material from demolition or construction can be easily recycled, with the magnetic properties of steel greatly facilitating its separation from other materials. Thus, in addition to steel's outstanding recycled content and an enviable reclamation rate, steel's other functional properties contribute to the material's solid environmental performance.

As with any building process or material, there are areas for improvement. A great benefit of LEED is that it can help the steel industry recover even more scrap as contractors improve their recycling collection methods at the job site, so less incidental iron and steel scrap escapes to landfills. Similarly, commercial buildings and residential housing can have better disciplined recycling systems for increased recovery.

As steel products reach the end of their useful life, we want to see even more recycled into new steel products for future service to society.



American  
Iron and Steel  
Institute

## On-Line Steel Recycling Resources

### [www.recycle-steel.org](http://www.recycle-steel.org)



Includes detailed information on recycling rates, recycling databases, and the environmental benefits of steel for homes, buildings, steel roofing, and bridges.

### [www.aisc.org/sustainability](http://www.aisc.org/sustainability)

Includes detailed information on how steel factors into the LEED® rating system, steel mill recycled content documentation, and articles about the use of steel in sustainable projects.

# Modern Steel Production Technologies

## Typical BOF Products



**plate**

**purlins**

Steel is the world's, as well as North America's, most recycled material, and in the United States alone, almost 73 million tons of steel were recycled or exported for recycling in 2006. This is done for economic as well as environmental reasons. It is always cheaper to recycle steel than to mine virgin ore and move it through the process of making new steel. However, it should also be clearly understood that many steel applications are durables, and even though two out of every three pounds of new steel are produced from old steel, the fact that cars, appliances, and bridges last a long time makes it necessary to continue to mine virgin ore to supplement the production of new steel. Economic expansion, domestically and internationally, creates additional demand that cannot be fully met by available scrap supplies.

Unlike other competing industries, recycled content in the steel industry is second nature. The North American steel industry has been recycling steel scrap for over 160 years through the growth of 1,800 scrap processors and some 12,500 auto dismantlers. Many of them have been in the business for more than 100 years. The pre-consumer, post-consumer, and total recycled content of steel products in the United States can be determined for the calendar year 2006 using information from the American Iron and Steel Institute (AISI), the Institute of Scrap Recycling Industries (ISRI), and the U.S. Geological Survey. Additionally, a study prepared for the AISI by William T. Hogan, S.A., and Frank T. Koelble of Fordham University is used to establish pre- and post-consumer fractions of purchased scrap.

Individual company statistics are not applicable or instructive because of the open loop recycling capability that the steel and iron industries enjoy, with available scrap typically going to the closest melting furnace. This open loop recycling allows, for example, an old car to be melted down to produce a new soup can, and then, as the new soup can is recycled, it is melted down to produce a new car, appliance, or perhaps a structural beam used to repair some portion of the Golden Gate Bridge.

## Basic Oxygen Furnace

The basic oxygen furnace (BOF) facilities consumed a total of 13,509,000 tons of ferrous scrap in the production of 46,802,100 tons of raw steel

during 2006. Based on U.S. Geological Survey statistics, 1,000,000 of these ferrous scrap tons had been generated as unsalable steel product within the confines of these steelmaking sites. In the steel industry, these tons are classified as "home scrap," but are a mix of runaround scrap and pre-consumer scrap. Estimates by the Steel Recycling Institute identify about 80% of this home scrap as pre-consumer scrap, equating to 800,000 tons (1,000,000 × 80%). Additionally, these operations reported that they consumed 122,400 tons of obsolete scrap (buildings and warehouses dismantled on-site at the mill) during this timeframe. This volume is classified as post-consumer scrap.

As a result of the above, based on the total scrap consumed, outside purchases of scrap equate to 12,386,600 tons [13,509,000 – (1,000,000 + 122,400)]. According to the Fordham University study, the post-consumer fraction of the purchased ferrous scrap would be 83.4%, while 16.6% of these purchases would be pre-consumer. This equates to 2,056,200 tons of pre-consumer scrap (12,386,600 × 16.6%). This "prompt scrap" is mainly scrap generated by manufacturing processes for products made with steel.

Therefore, the **total recycled content** to produce the 46,802,100 tons of raw steel in the BOF is:

$$\frac{13,509,000}{46,802,100} = 28.9\%$$

(Total Tons Ferrous Scrap / Total Tons Raw Steel)

Also, the **post-consumer recycled content** is:

$$(12,386,600 - 2,056,200) + 122,400 = 10,452,800$$

and:

$$\frac{10,452,800}{46,802,100} = 22.3\%$$

(Post-Consumer Scrap / Total Tons Raw Steel)

Finally, the **pre-consumer recycled content** is:

$$\frac{(800,000 + 2,056,200)}{46,802,100} = \frac{2,856,200}{46,802,100} = 6.1\%$$

(Pre-Consumer Scrap / Total Tons Raw Steel)

## Electric Arc Furnace

The electric arc furnace (EAF) facilities consumed a total of 48,966,900 tons of ferrous scrap in the production of 59,126,400 tons of raw steel during 2006. Based on U.S. Geological Survey adjusted statistics, 16,320,000 of these ferrous scrap tons had been generated as unsalable steel product within the confines of these steelmaking sites. Again, in the steel industry, these tons are classified as "home scrap," but are a mix of run-around scrap and pre-consumer scrap. Estimates by the Steel Recycling Institute identify about 80% of this home scrap as pre-consumer scrap, equating to 13,056,000 tons (16,320,000 × 80%). Additionally, these operations reported that they consumed 358,300 tons of obsolete scrap (buildings and warehouses dismantled on-site at the mill) during this time frame. This volume is classified as post-consumer scrap.

As a result, based on the total scrap consumed, outside purchases of scrap equate to 32,288,600 tons [48,966,900 - (16,320,000 + 358,300)]. According to the Fordham University study, the post-consumer fraction of the purchased ferrous scrap would be 83.4%, while 16.6% of these purchases would be pre-consumer. This equates to 5,359,900 tons of pre-consumer scrap (32,288,600 × 16.6%). This "prompt scrap" is mainly scrap generated by manufacturing processes for products made with steel.

Therefore, the **total recycled content** to produce the 59,126,400 tons of raw steel in the EAF is:

$$48,966,900 / 59,126,400 = 82.8\%$$

(Total Tons Ferrous Scrap / Total Tons Raw Steel)

Also, the **post-consumer recycled content** is:

$$(32,288,600 - 5,359,900) + 358,300 = 27,287,000$$

and:

$$27,287,000 / 59,126,400 = 46.2\%$$

(Post-Consumer Scrap / Total Tons Raw Steel)

Finally, the **pre-consumer recycled content** is:

$$(13,056,000 + 5,359,900) / 59,126,400 =$$

$$18,415,900 / 59,126,400 = 31.1\%$$

(Pre-Consumer Scrap / Total Tons Raw Steel)

The above discussion and calculations demonstrate conclusively the inherent recycled content of today's steel in North America. To buy steel is to "Buy Recycled."

Understanding the recycled content of BOF and EAF steels, one should not attempt to select one steel producer over another on the basis of a simplistic comparison of relative scrap usage or recycled content. Rather than providing an enhanced environmental benefit, such a selection could prove more costly in terms of total life cycle assessment energy consumption or other variables. Steel does not rely on "recycled content" purchasing to incorporate or drive scrap use. It already happens because of the economics. Recycled content for steel is a function of the steelmaking process itself.

After its useful product life, regardless of its BOF or EAF origin, steel is recycled back into another steel product. Thus steel with more than 80% recycled content cannot be described as environmentally superior to steel with 30% recycled content. This is not contradictory because they are both complementary parts of the total interlocking infrastructure of steelmaking, product manufacture, scrap generation and recycling. The recycled content of EAF relies on the embodied energy savings of the steel created in the BOF.

Steel is truly the most recycled material.

## Contact Us




### Steel Recycling Institute

680 Andersen Dr. • Pittsburgh, PA 15220-2700  
412.922.2772 • sri@recycle-steel.org  
www.recycle-steel.org

### American Institute of Steel Construction, Inc.

One East Wacker Dr., #700 • Chicago, IL 60601  
866.ASK.AISC • solutions@aisc.org  
www.aisc.org

## Typical EAF Products

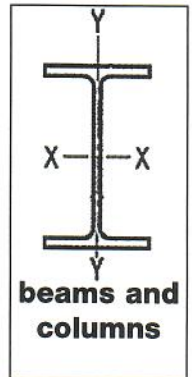

plate

steel deck

piling

# To: Architects, Engineers, Designers, and Specifiers

## Re: LEED®-NC Version 2.2 Recycled Content Value of Steel Building Products

The U.S. Green Building Council Leadership in Energy & Environmental Design (LEED®) Green Building Rating System aims to improve occupant well-being, environmental performance and economic returns of buildings using established and innovative practices, standards, and technologies.

**Materials & Resources Credit 4: Recycled Content** intends to increase demand for building products that incorporate recycled content materials, therefore reducing impacts resulting from extraction and processing of new virgin materials. As discussed and demonstrated below, steel building products contribute positively toward points under Credits 4.1 and 4.2. The following is required by LEED-NC Version 2.2:

**Credit 4.1 (1 point)** "Use materials with recycled content such that the sum of post-consumer recycled content plus one-half of the pre-consumer content constitutes at least 10% (based on cost) of the total value of the materials in the project."

**Credit 4.2 (1 point)** "Use materials with recycled content such that the sum of post-consumer recycled content plus one-half of the pre-consumer content constitutes at least 20% of the total value of the materials in the project."

"The recycled content value of a material assembly shall be determined by weight. The recycled fraction of the assembly is then multiplied by the cost of assembly to determine the recycled content value." Since steel (the material) and steel (the building product) are the same, the value of the steel building product is directly multiplied by steel's recycled content, or:

$$\text{Steel Recycled Content Value} = (\text{Value of Steel Product}) (\text{Post-Consumer \%} + \frac{1}{2} \text{Pre-Consumer \%})$$

The information contained within this brochure provides post-consumer and pre-consumer recycled content percentages for North American steel building products. These percentages and values of steel building products are easily entered into LEED Letter Template spreadsheet for calculation. To illustrate the application of these steel recycled content values to LEED, manual calculations are shown below for typical Basic Oxygen Furnace (BOF) and Electric Arc Furnace (EAF) steel building products with nominal \$10,000 purchases, using 2005 data. Steel building products include steel stud framing, structural steel framing (wide-flange beams, channels, angles, etc.), rebar, roofing, siding, decking, doors and sashes, windows, ductwork, pipe, fixtures, hardware (hinges, handles, braces, screws, nails), culverts, storm drains, and manhole covers.

### BOF Steel Recycled Content Value for Typical Product:

#### Steel Stud Framing

$$\text{Value} = (\$10,000) (22.3\% + \frac{1}{2} 6.1\%) = (\$10,000) (25.35\%) = \$2,535$$

(Exceeds 10% and 20% goals)

### EAF Steel Recycled Content Value for Typical Product:

#### Wide-Flange Structural Steel Framing

$$\text{Value} = (\$10,000) (46.2\% + \frac{1}{2} 31.1\%) = (\$10,000) (61.75\%) = \$6,175$$

(Exceeds 10% and 20% goals)



**Steel Recycling  
Institute**

680 Andersen Dr.  
Pittsburgh, PA  
15220-2700  
412.922.2772  
sri@recycle-steel.org



**American  
Institute of Steel  
Construction, Inc.**

1 East Wacker Dr.,  
Suite 700  
Chicago, IL  
60601  
866.ASK.AISC  
solutions@aisc.org



**American  
Iron and Steel  
Institute**

**American  
Iron and Steel  
Institute**  
1140  
Connecticut  
Ave., Suite 705  
Washington, DC  
20036  
202.452.7100

# Cool Metal Roofing

Sustainable and Environmentally Friendly



## You can save money with an *energy efficient* metal roof.

Central States' cool metal roofing products are an excellent choice for those looking to install a sustainable, energy efficient roof. Metal roofing lowers a building's heat gain through its roof, saving money on cooling costs.

Since metal roofing is sustainable and environmentally friendly, it can qualify for LEED points, tax credits, and homeowners insurance discounts. This is because of the energy efficiency, high recycled content, long life span, and fire resistance ratings of Central States' metal roofing products.

Central States' roofing products come in a wide range of emissivity and solar reflectivity values perfect for any environment.

- Can reduce Energy bills up to 40%.
- Last 2-3 times longer than traditional asphalt shingles.
- Made of up to 95% recycled content.
- Low weight allows it to be installed over a layer of shingles, saving time, money, and reducing waste.



[CENTRALSTATESCO.COM](http://CENTRALSTATESCO.COM)

Copyright © 2021, Central States Manufacturing, Inc., All Rights Reserved.  
Galvalume™ is a registered trademark of BIEC International, Inc.

    FLYR\_CoolMetal\_240418

# Compare SRI values to find the best finish for your project.

Two factors, solar reflectivity and emissivity, are considered when determining the energy efficiency of roofs. These two factors combine to make the Solar Reflectivity Index (SRI) value.

Use this chart to help you choose the best finish for your project.

COLOR	INITIAL SOLAR REFLECTIVITY	3-YEAR SOLAR REFLECTIVITY	INITIAL EMISSIVITY	SRI VALUE
Alamo	0.55	0.55	0.83	77
Black	0.25	0.24	0.83	25
Brilliant	0.65	0.65	0.83	84
Brown	0.25	0.25	0.83	34
Burgundy	0.25	0.25	0.83	31
Burnished Slate	0.32	0.32	0.83	35
Charcoal	0.25	0.25	0.83	39
Colony	0.32	0.32	0.83	37
Copper Metallic	0.35	0.35	0.75	43
Crimson	0.31	0.25	0.86	31
Desert	0.32	0.32	0.83	47
Fern	0.25	0.25	0.83	27
Forest	0.25	0.25	0.83	24
Gallery	0.25	0.25	0.83	24
Galvalume	0.77	0.51	0.08	72
Galvanized	0.58	0.25	0.07	32
Gray	0.35	0.35	0.83	52
Hawaiian	0.25	0.25	0.83	21
Hunter	0.25	0.25	0.83	37
Ivory	0.55	0.55	0.83	77
Light Stone	0.55	0.55	0.83	65
Ocean	0.25	0.25	0.87	24
Pewter Gray	0.35	0.35	0.83	52
Polar	0.55	0.55	0.83	77
Rustic	0.25	0.25	0.83	35
Tan	0.45	0.45	0.83	50
Taupe	0.35	0.35	0.83	41

**Solar Reflectivity:** is a measure of a material's ability to reflect sunlight. This characteristic of metal roofing is the most important in terms of energy savings. Cool metal roofing reflects much of the sun's rays, making the surface of the metal much cooler than material with a lower solar reflectivity rating.

**Emissivity:** is the ability of a material to release absorbed heat. A low emissivity rating means the material will be hot to the touch (it doesn't release the heat), while material with a higher emissivity rating will be cooler to the touch. Therefore, metal with a low emissivity rating retains heat and may be more desirable for a cooler climate, while a high emissivity rating is more effective for saving energy in a warmer climate.

**LEED Rating System:** LEED stands for Leadership in Energy and Environmental Design. The LEED rating system was designed to guide and distinguish high performance buildings that have less of an impact on the environment, are healthier for those who work and/or live in them, and are more profitable than their conventional counterparts. Using metal and other "green" products can earn points towards LEED certification.

Solar reflectance values are determined by means of a solar spectrum reflectometer in accordance with ASTM C 1549. Thermal emittance values are determined in accordance with ASTM C 1371 SRI is calculated in accordance to ASTM E 1980 with medium wind speed. Laboratory and Exposure site are ISO 17025 Accredited, Laboratory is also EPA Accredited. Panels are unwashed.